


P/N	DESCRIPTION
C6212	1/2" MPT X 100 psig (6.9 bar)
C6117	1/2" MPT X 125 psig (8.6 bar)
C6121	1/2" MPT X 150 psig (10.3 bar)

P/N	F.P.T. SIZE	TUBULATION OPTIONS			
		A		B	
C6026	1/2"	10.3 in	262 mm	2.90 in	74 mm
C6027	1"	10.3 in	262 mm	3.25 in	83 mm

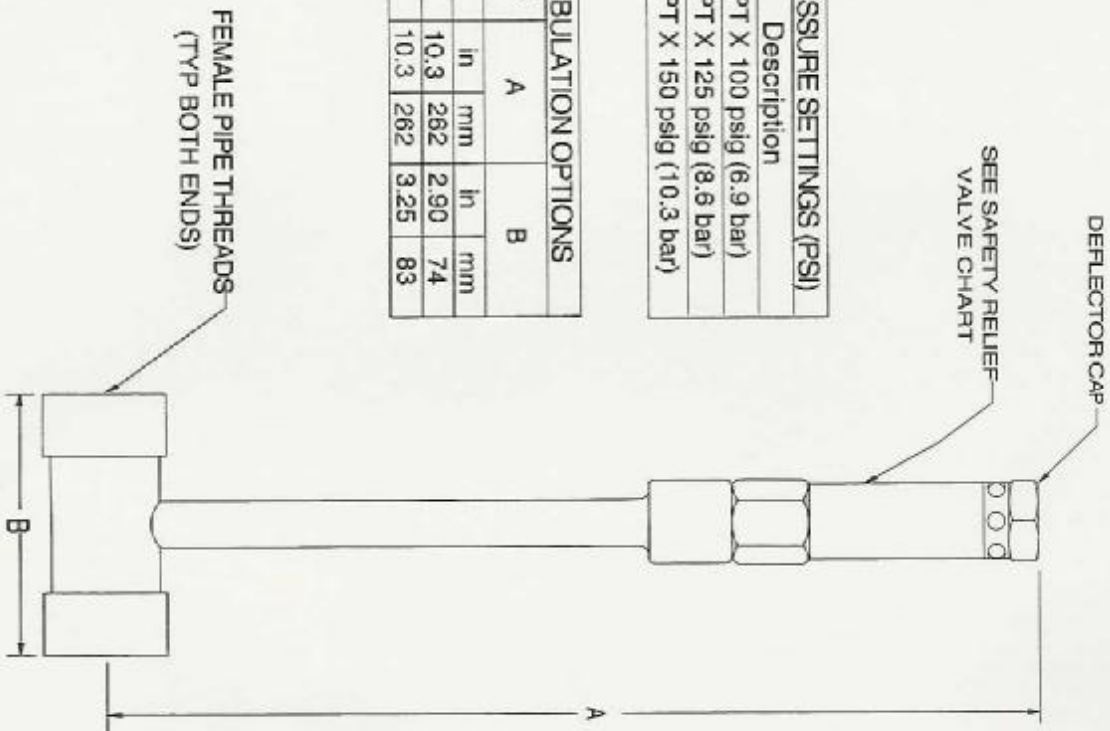

HORIZONTAL SAFETY RELIEF VALVE ASSY

PURPOSE

To avoid potentially dangerous overpressure within a StatFlex™ piping system.

CHARACTERISTICS

To be located between two shut off points. Usually mounted near the ends.

Primary material - 300 series stainless steel with brass valve body.

Safety Relief Valve to have deflector to direct LN2 flow sideways.

Must be mounted with relief valve straight up.

Do not insulate more than halfway up riser.