


P/N	DESCRIPTION	PRESSURE SETTINGS (PSI)
C6212	1/2" MPT X 100 psig (6.9 bar)	
C6117	1/2" MPT X 125 psig (8.6 bar)	
C6121	1/2" MPT X 150 psig (10.3 bar)	

P/N	F.P.T. SIZE	A		B		C	
		in	mm	in	mm	in	mm
C6002	1/2"	10.3	262	3.5	89	2.90	74
C6003	1"	10.3	262	3.5	89	3.25	83

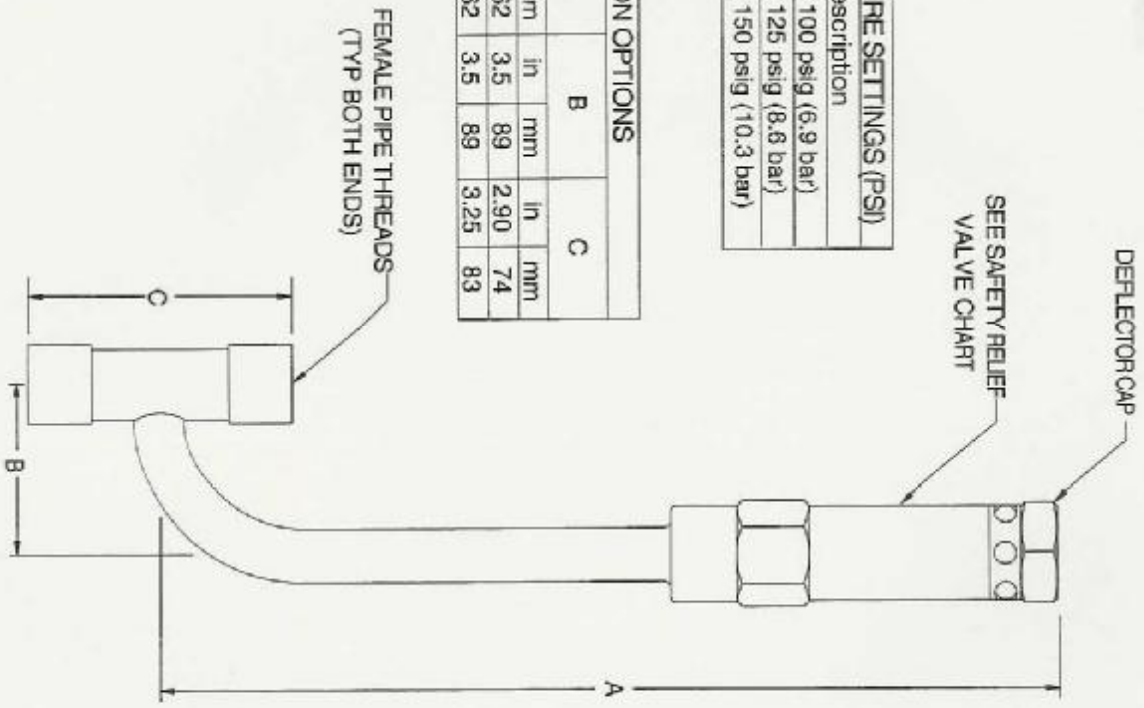

VERTICAL SAFETY RELIEF VALVE ASSY

PURPOSE

To avoid potentially dangerous overpressure within a Statiflex™ piping system.

CHARACTERISTICS

- To be located between two shut off points in system.
- Primary material - 300 series stainless steel with brass valve body.
- Safety Relief Valve to have deflector to direct LN2 flow sideways.
- Must be mounted with relief valve straight up.
- Do not insulate more than halfway up riser.